



Features

- Compliant with standard VESA 75 × 75 mm / 100 × 100 mm mounting patterns
- Dedicated DC-in power interface for independent power connection
- Designed for embedded wall installations or integration with mounting and adapter hardware

Ruby10 VESA KIT Specifications

Power Supply

Power Adapter Input 5.0 Vdc = 3.0 A

I/O


Dimension 148.76 x 114.57 x 15.25 (mm)

Gross Weight Ruby10 + VESA Bracket: approx. 570 g | VESA Bracket only: approx. 75 g

Installation Steps

- | | |
|------|--|
| Step | <ol style="list-style-type: none"> 1. Remove the Ruby 10 battery cover. 2. Remove the Ruby 10 battery. 3. Install the VESA bracket onto the Ruby10 device. 4. Secure the bracket using eight (8) screws. |
|------|--|

Dimensions

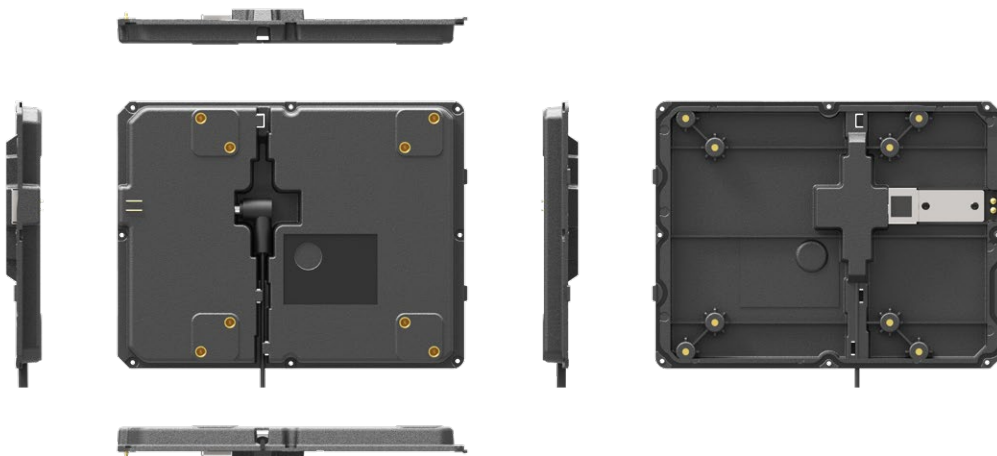

All specifications are subject to change without notice. Last update: APR. 14. 2026

